

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A47K 5/12		A1	(11) International Publication Number: WO 98/26702
			(43) International Publication Date: 25 June 1998 (25.06.98)
(21) International Application Number: PCT/US97/23763			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 12 December 1997 (12.12.97)			
(30) Priority Data: 08/768,562 18 December 1996 (18.12.96) US			
(71) Applicant: GEORGIA-PACIFIC CORPORATION [US/US]; 133 Peachtree Street, N.E., Atlanta, GA 30348-5605 (US).			
(72) Inventor: FISSCHER, Abraham, J.; 1018 Albion Avenue, Atlanta, GA 30307 (US).			
(74) Agents: McKEE, Christopher, L. et al.; Banner & Witcoff, Ltd., 11th floor, 1001 G Street, N.W., Washington, DC 20001-4597 (US).			

Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: LIQUID DISPENSER AND CAP VALVE ASSEMBLY THEREFOR

(57) Abstract

A liquid dispenser (31) and cap valve assembly (1) therefor is provided to dispense a controlled dose of liquid. The liquid dispenser (31) and cap valve assembly (1) therefor is particularly suitable for dispensing liquid soaps and lotions. The liquid dispensing cap valve assembly (1) comprises a dosing cap (3) having an upper portion (11) and a lower portion (13), a divider piece (5) mounted in the dosing cap (3), and two oppositely acting check valves (7, 9). The lower portion (13) and the divider piece (5) defines a dosing reservoir (17). A first check valve (7) mounted on the divider piece (5) serves to open and close a liquid passageway from a storage container (35) to the dosing reservoir (17), depending on a fluid pressure in the dosing reservoir (17). A second check valve (9) fixedly mounted to the lower portion (13) serves to open and close a liquid passageway from the dosing reservoir (17) to an outlet orifice (14), acting oppositely to the first check valve (7). The liquid dispenser (31) comprises a liquid storage container (35) the cap valve assembly (1) connected to the storage container (35), an actuator assembly having an actuation lever (41), and a mounting member. The mounting member provides first and second pivotal mounting locations for the actuation lever (41). When the actuation lever (41) is mounted in the first location, the lever serves to actuate a liquid dispensing movement by pivotal motion in one direction. Conversely, when the lever (41) is mounted in the second location, it serves to actuate the movement by pivotal motion in an opposite direction.

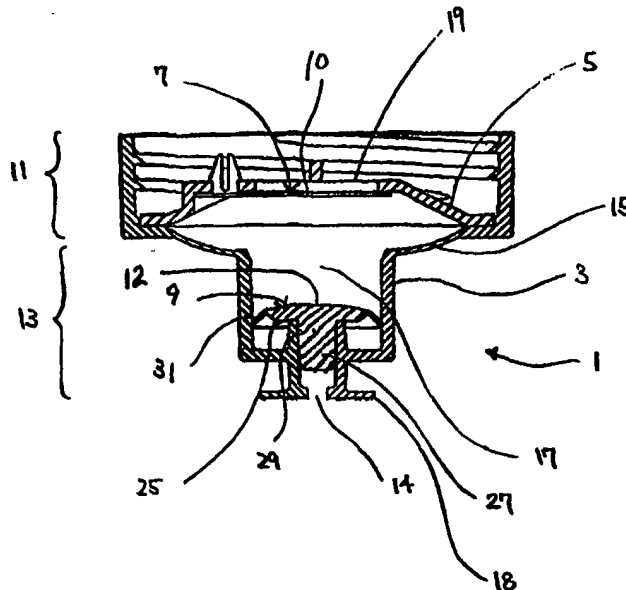

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

LIQUID DISPENSER AND CAP VALVE ASSEMBLY THEREFOR

BACKGROUND OF THE INVENTION

The present invention relates to liquid dispensers and cap valve assemblies for dispensing a controlled dose of liquid. In particular, the invention relates to liquid dispensers and cap valve assemblies especially suited for dispensing liquid soaps and lotions.

Known liquid dispensers typically comprise a storage container, a housing in which the storage container is mounted, a cap valve assembly attached to the storage container, and a valve actuator. There are many applications for a liquid dispenser that can dispense a controlled amount of liquid. For example, it is convenient to use such a dispenser for liquid hand soap in a rest room. Ordinarily, the hand soap dispenser is installed on a wall of the rest room, and users can receive a desired amount of hand soap by moving the attached actuator, e.g., a lever, a button, or the like. In a different environment, the dispenser may also be utilized to dispense condiments, e.g., ketchup or mustard.

The basic structure of a liquid dispensing cap valve assembly comprising a resilient dosing reservoir and a pair of oppositely acting check valves is known in the art. One known type of liquid dispensing valve assembly has a dosing cap having an open end securable on a storage container, resilient reservoir walls, and a dispensing orifice. See U.S. Patent No. 3,828,985 (Schindler). In one embodiment, the cap may be integrally

molded as a single piece. However, the valve assembly disclosed in the Schindler patent has a spring loaded disk for opening and closing a passageway for liquid to flow out of the orifice. The valve also has an upper check valve comprising a sealing element loosely fitted in an aperture of an inlet orifice, for allowing a liquid to flow from the storage container and into the dosing reservoir. Similar to the Schindler patent, the Burd U.S. Patent No. 4,978,036 discloses a lower check valve with a spring-loaded ball. An upper check valve of the Burd patent comprises a resilient sealing flap or a floating ball.

The cap valves of the Schindler and Burd patents have numerous operative parts. The Schindler valve assembly has at least six parts. Specifically, the Schindler valve assembly in Figure 2 comprises retaining clapper 2, spring 3, a retaining disk 5, separating member 6, valve body 16, and apertured disk 20. The Burd valve assembly includes six parts: cylindrical wall 147, nozzle assembly 151, second check valve means 167, bias spring 173, planer member 150, and valve means 163. See Figure 10 of the Burd patent. Needless to say, assembling a large number of parts is laborious and drives up the manufacturing cost. Additionally, the valve assemblies as in the Schindler and Burd patents may be unsuited for recycling because the assemblies include a spring, which is typically made of metal, thus requiring a sort of the metal piece from plastic pieces.

Another known type of valve assembly, produced by Stockhausen, Inc., of Greensboro, N.C., uses a resilient sealing disk mounted on a pedestal movable within a cylinder, in place of a spring-loaded disk and resilient reservoir walls. In this arrangement, the down stroke of the sealing disk creates vacuum within the cylinder reservoir to draw liquid into the reservoir. On the other hand, the up stroke of the sealing disk generates pressure within the reservoir. The pressure causes the circumferential edges of the sealing disk to deform away from the cylinder walls, creating a passageway and allowing the

liquid to be dispensed. Although this type of valve assembly does not demand as many parts as the spring-loaded valve types, abrasion due to the sliding action of the disk edges against the cylinder walls may result in a loss of the seal rendering the valve partially or wholly inoperative. Moreover, the valve might not smoothly operate, or become jammed
5 in the cylinder due to residue from the dispensed liquid or imperfect sizing of the parts.

Known mechanisms for actuating cap valve assemblies include an actuator, such as a pivotable lever arm, attached to a liquid dispensing cap valve assembly. In some arrangements, the liquid is dispensed when the actuator is pulled towards the user. In other arrangements, liquid is dispensed by pushing a lever. Because personal and market
10 preferences between the two types of actuators varies, a liquid dispenser having versatility to readily switch between both types of dispensing action, without any change of parts would be desirable.

SUMMARY OF THE INVENTION

In view of foregoing, it is general object of the present invention to provide an
15 improved liquid dispenser and cap valve assembly therefor.

More specifically, it is an object of the invention to provide a cap valve assembly having a reduced member of parts, thus simplifying the assembly process.

Another object of the invention is to provide a cap valve assembly whose parts are made exclusively of molded plastic, thereby facilitating recycling of the parts by
20 eliminating the need for a sorting process.

Still another object of the invention is to provide a cap valve assembly as aforesaid that is not prone to malfunction, e.g., leakage and loss of seal due to abrasion of moving parts.

Yet another object of the invention is to provide a liquid dispenser which allows versatility to accommodate personal and market preferences as to the dispensing action of an actuator.

These and other objectives are achieved in accordance with the present invention

5 by a liquid dispenser cap assembly. The assembly comprises a dosing cap which has an upper portion connectible to a liquid storage container and a lower portion having an outlet orifice. A divider piece is mounted within the cap between the upper and lower portions. The divider and the lower portion define a dosing reservoir that is expansible and contractible by application of external forces thereto. A first check valve is mounted

10 on the divider piece and serves to open and pass liquid from the storage container into the reservoir in response to a decrease in fluid pressure caused by an external force induced expansion of the reservoir. The first check valve also serves to remain closed in order to prevent liquid from returning to the storage container from the reservoir during periods of increased fluid pressure brought about by an external force induced contraction of the

15 reservoir. A second check valve comprises a valve seal element mounted on and extending outwardly from a pedestal fixedly mounted to the lower portion. The seal element has a flexible outer edge portion provided in sealing contact with a surrounding wall of the lower portion. The flexible edge portion is resiliently deformable away from the wall under fluid pressure developed in the reservoir by the contraction, to create a

20 passageway for liquid to flow out of the reservoir and the outlet orifice. The edge portion is configured to remain in contact with the wall, forming a seal therewith, under a decrease in fluid pressure caused by the expansion.

In another aspect, the invention is embodied in a liquid dispenser. The liquid dispenser comprises a liquid storage container, a cap valve assembly connected with the

storage container and having a movable operation member, and an actuator assembly for actuating movement of the operation member to dispense liquid from the storage container. The actuator assembly comprises an actuation lever connectible with the operation member, and a mounting member providing first and second pivotable mounting
5 locations for the actuation lever. The actuation lever, when mounted in the first mounting location, serves to actuate a liquid dispensing movement of the operation member when pivoted in a first direction, and when mounted in the second mounting location, serves to actuate a liquid dispensing movement of the operation member when pivoted in a second direction opposite the first direction.

10 These and other objects, features and advantages of the present invention will become apparent and fully understood from the following detailed description of the preferred embodiments, taken in connection with the appended drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

15 Fig. 1 is an axial cross-sectional view of the cap valve assembly according to the present invention.

 Fig. 2 is a perspective view of a divider piece, and a first check valve associated therewith, of the cap valve assembly.

 Fig. 3 is a sectional view illustrating an alternative first check valve structure.

 Fig. 4 is a top plan view illustrating a second alternative first check valve structure.

20 Fig. 5 is a sectional view taken on line A-A in Fig. 4.

 Fig. 6 is a side elevation view of a valve element of a second check valve of the cap valve assembly.

 Fig. 7 is a bottom plan view of the second check valve element shown in Fig. 6.

Fig. 8 is a front elevation view, partially broken-away, of a liquid dispenser according to the present invention, with a front housing cover and brace thereof removed.

Fig. 9 is a sectional view of the liquid dispenser shown in Fig. 8, with the cap valve assembly and an actuator lever shown in partially broken-away side elevation.

5 Fig. 10 is a sectional view taken on line B-B in Fig. 9.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring first to Fig 1, illustrated is a cap valve assembly 1 in accordance with the present invention. Cap valve assembly 1 comprises a dosing cap 3, a divider piece 5, a first check valve 7, and a second check valve 9. In a preferred embodiment, cap valve assembly 1 consists of only four parts: dosing cap 3, divider piece 5, and movable valve elements 10, 12 of valves 7, 9 respectively. Having a reduced number of parts simplifies the assembly process. All the parts can be readily manufactured from molded plastic by conventional techniques. Making cap valve assembly 1 exclusively of molded plastic facilitates recycling of the parts because it eliminates the need for a parts sorting process.

15 Dosing cap 3 has an upper portion 11 connectible to a liquid storage container and a lower portion 13 having an outlet orifice 14. In the illustrated embodiment, dosing cap 3 comprises a resilient wall 15 in lower portion 13. Resilient wall 15 is deformable by an application of external forces. Preferably, upper portion 11 and lower portion 13 are integrally molded as a single piece. Preferably, upper portion 11 of dosing cap 3 is threaded for easy attachment to a liquid storage container. Also, lower portion 13 has a flange structure 18 for connection of a dispensing actuator.

20 Divider piece 5 is mounted within dosing cap 3 between upper portion 11 and lower portion 13. Divider piece 5 is friction-fit within dosing cap 3, thereby eliminating

the need for adhesives. Importantly, divider piece 5 and lower portion 13 define a dosing reservoir 17 within dosing cap 3. As depicted in Fig. 2, divider piece 5 has an aperture 19 for liquid to pass from the liquid storage container to dosing reservoir 17.

Referring back to Fig. 1, dosing reservoir 17 acts as a temporary retainer for the liquid to be dispensed, capable of retaining a predetermined amount of the liquid. Resilient wall 15 allows dosing reservoir 17 to be expanded and contracted by application of external forces. By changing the internal volume of dosing reservoir 17, fluid pressure inside dosing reservoir changes inversely, thereby controlling first and second check valves 7, 9.

First check valve 7 is provided on divider piece 5. In a preferred embodiment, first check valve 7 is a reed valve, and associated valve element 10 comprises a resilient flap and cantilever mounting structure which can be snap-fitted onto divider piece 5. First check valve 7 serves to open and close valve aperture 19 depending on the fluid pressure inside dosing reservoir 17. When a downward pulling force on flange 18 induces expansion of dosing reservoir 17, a decrease in a fluid pressure in dosing reservoir 17 causes first check valve 7 to open, and liquid flows through aperture 19 into dosing reservoir 17 from the storage container, under force of gravity and/or vacuum, until dosing reservoir 17 is filled. Conversely, when an upward pushing force on flange 18 induces contraction of reservoir 17, an increase in the fluid pressure in dosing reservoir 17 causes the resilient flap of element 10 on flange 18 to completely seal aperture 19 and prevent the liquid from flowing back into the storage container.

Fig. 3 illustrates an alternative first check valve structure. A movable valve element 21 is loosely fitted into a circular aperture 19', retained on a divider piece 5' by a conical cap structure 22 and a sealing element 23. This arrangement allows liquid to

normally flow through aperture 19' when check valve 21 is open, as in Fig. 3. However, with an increase in the fluid pressure, valve element 21 is pushed upward, and a semi-spherical upper surface of sealing element 23 completely closes aperture 19', thereby preventing the fluid from flowing back into the storage container.

5 Figs. 4-5 illustrate a second alternative structure of the first check valve. A modified divider piece 5" has passageway 26 which is opened and closed by a pair of resilient flaps 28. Lower edges of resilient flaps 28 are normally held together in a V-configuration by a relatively small bias force of the flap material. A relative decrease in fluid pressure within dosing reservoir 17 caused by a downward pull on flange 18 causes
10 flaps 28 to temporarily separate in order to open passageway 26 and thereby let liquid flow into dosing reservoir 17 from the storage container. Divider piece 5" can be molded in the shape shown and then slit in a secondary operation to form resilient flaps 28.

Referring to Figs. 1, 6 and 7, a second check valve 9 comprises a mushroom-shaped valve seal element 12 fixed within lower portion 13. Element 12 comprises a disk
15 25 and a pedestal 27. Pedestal 27 is friction-fit within a cylinder 29 of lower portion 13. Pedestal 27 has a flanged structure (see Figs. 6-7) allowing liquid to pass through cylinder 29 to orifice 14. The thickness of disk 25 reduces outwardly to a flexible outer edge 31.

The above arrangement allows second check valve 9 to act oppositely to first check valve 7 with respect to changes in the fluid pressure in dosing reservoir 17. When
20 a downward pulling force on flange 18 induces a decrease in the fluid pressure in dosing reservoir 17, outer edge 31 remains in sealing contact with an internal cylindrical wall of lower portion 13. Therefore, while the first check valve is open and liquid passes from the storage container to dosing reservoir 17, second check valve 9 remains closed and prevents the liquid in dosing reservoir 17 from passing through to outlet orifice 14.

On the other hand, when a pushing force on flange 18 induces an increase in the fluid pressure in reservoir 17, the increased fluid pressure causes outer edge 31 to resiliently deform downwardly and away from the cylindrical internal wall of lower portion 13, thereby creating a passageway for the liquid to pass through second check valve 9 and flow out of dosing reservoir 17 through outlet orifice 14. Because valve seal element 12 does not move with respect to cylinder 29, and incurs no frictional motion, it is not prone to malfunction due to abrasion of moving parts.

Referring to Figs. 8-10, illustrated is a liquid dispenser 31 in accordance with the present invention. Liquid dispenser 31 comprises a housing including a front cover 33 (see Fig. 9) removably secured to a wall-mountable base 34. A liquid storage container 35 is contained within an upper part of the housing. The housing and liquid storage container 35 can be made of plastic by conventional techniques. Container 35 is filled with liquid soap or other liquid product to be dispensed. Preferably, liquid storage container 35 has a threaded opening for threadably receiving cap valve assembly 1. Container 35 may be a closed collapsible type which progressively collapses as the liquid contents is drawn out.

Cap valve assembly 1 is attached to liquid storage container 35, and resides within a smaller lower part of the housing. In addition, the lower part of base 34 serves as part of an actuator assembly, for actuating dispensing from cap valve assembly 1. In particular, opposed in-set side walls 36 (only one visible) of the lower part of base 34 are provided with two pairs 37, 39 of aligned pivot holes (only one hole of each pair visible) for pivotally mounting an actuation lever 41, in one of two alternative positions. As seen in Fig. 9, actuation lever 41 has a generally triangular shape. A pair of aligned pivot pins 42 are provided at one corner of lever 41, having protruding ends which are selectively

received in the aligned holes of one of pivot hole pairs 37, 39 (as shown, front pivot hole pair 37). A second corner of lever 41 is provided with a fork-like structure 43 for engaging with flange 18 of cap valve assembly 1. The remaining corner of lever 41 provides a hand-graspable tab 45 for pivoting lever 41, about pivot pins 42, to thereby
5 dispense liquid from cap valve assembly 1.

Having two mounting locations provides versatility in order to accommodate personal and market preferences as to the dispensing action of actuation lever 41. Actuation lever 41 can be pivotally mounted in either location simply and securely, without the need for any additional parts or tools. Specifically, each of the pivot holes of
10 pivot hole pairs 37, 39 is shaped as a key-way. The protruding ends of pivot pins 42 are keyed to fit into the pivot holes when appropriately oriented, and to become rotatably secured therein once rotated to a use position with structure 43 engaged with flange 18 of cap valve assembly 1.

Pivot hole pair 37 is provided forwardly of flange 18 of cap valve assembly 1.
15 Pivot hole pair 39 is provided rearwardly of flange 18. When actuation lever 41 is mounted in hole pair 37 (as shown), it serves to actuate a liquid dispensing movement of flange 18 when pushed rearwardly, away from the user. On the other hand, when reverse-mounted in pivot hole pair 39, actuation lever 41 serves to actuate a liquid dispensing movement when pulled toward the user. The amount dispensed per stroke of lever 41 can
20 be controlled by a calibration member 44 mounted to the side of actuation lever 41, which abuts with an opposed recessed surface 46 of sidewall 36. As best seen in Fig. 9, adjustability of the stroke is provided by calibration member 44 which comprises a collar 47 mountable on a square post 49 and having sides of different thickness. By rotating collar 47 at intervals of 90°, before it is mounted on post 49, the clearance between collar

47 and opposed recessed surface 46, and hence the stroke of lever 41, can be varied.

As best seen in Fig. 8, a front wall 51 of the lower part of base 34 is provided with a main cut-out 53 generally corresponding in shape to cap valve assembly 1. This allows storage container 35, with cap valve assembly 1 secured thereto, to be mounted on base 34, whereafter front cover 33 can be secured on base 34 to enclose container 35 and cap valve assembly 1. In addition, secondary cut-outs 55, 57 are provided adjacent main cut-out 47 for mounting a clip-type brace 59, in the manner best seen in Fig. 10, serving as a further means for holding cap valve assembly 1 in place.

The present invention has been described in terms of preferred embodiments thereof. Other embodiments, features, and variations within the scope and spirit of the appended claims will occur to persons skilled in the art from a review of this disclosure.

CLAIMS

1. A liquid dispensing cap valve assembly, comprising:

a dosing cap, said cap having an upper portion connectible to a liquid storage container and a lower portion having an outlet orifice;

5 a divider piece mounted within said cap between said upper and lower portions and defining in said lower portion a dosing reservoir that is expansible and contractible by application of external forces thereto;

a first check valve mounted on said divider piece and serving to open, to pass liquid from said storage container into said reservoir, in response to a decrease in fluid pressure caused by an external force induced expansion of said reservoir, and to remain closed, in order to prevent liquid from returning to said storage container from said reservoir, during periods of increased fluid pressure brought about by an external force induced contraction of said reservoir; and

15 a second check valve comprising a valve seal element mounted on and extending outwardly from a pedestal fixedly mounted to said lower portion, said seal element having a flexible outer edge portion provided in sealing contact with a surrounding wall of the lower portion, said flexible edge portion being resiliently deformable away from said wall under fluid pressure developed in said reservoir by said contraction, to create a passageway for liquid to flow out of said reservoir and said outlet orifice, said edge portion being configured to remain in contact with said wall, forming a seal therewith, under a decrease in fluid pressure caused by said expansion.

20 2. A cap valve assembly according to claim 1, wherein said lower portion comprises a resilient wall portion which is deformable to vary the volume of said reservoir by said application of external forces thereto.


3. A cap valve assembly according to claim 2, wherein said valve seal element is a disk, and said surrounding wall is cylindrical.
4. A cap valve assembly according to claim 3, wherein said flexible edge portion is tapered inwardly toward said reservoir.
- 5 5. A cap valve assembly according to claim 3, wherein said upper portion, resilient wall portion, disk, surrounding wall, pedestal and outlet orifice are arranged concentrically with respect to each other, and said disk, surrounding wall, pedestal and outlet orifice are movable as a unit with respect to said upper portion, by deformation of said resilient wall, in order to expand and contract the reservoir.
- 10 6. A cap valve assembly according to claim 1, wherein said pedestal is fixedly mounted in a passageway defined in said lower portion and extending from a region within said surrounding wall to said outlet orifice, in a manner so as to allow liquid to pass through said passageway.
- 15 7. A cap valve assembly according to claim 6, wherein said passageway is defined by a reduced diameter cylindrical wall of said lower portion concentrically arranged within said surrounding wall, and said pedestal comprises a plurality of radially extending flanges frictionally engaged with said cylindrical wall.
- 20 8. A cap valve assembly according to claim 1, wherein said first check valve is a reed valve comprising an aperture in said divider piece and a resilient flap mounted on a lower surface of said divider piece for movement into and out of sealing engagement with said aperture.
9. A cap valve assembly according to claim 1, wherein said assembly consists of molded plastic parts which are snap-fit and/or frictionally engaged with each other to form an operative assembly.

10. A cap valve assembly according to claim 9, wherein said operative assembly consists of four said molded plastic parts.

11. A liquid dispenser comprising a liquid storage container, a cap valve assembly connected with said storage container, said cap valve assembly having a movable operation member, and an actuator assembly for actuating movement of the operation member to dispense liquid from said storage container, said actuator assembly comprising an actuation lever connectible with said operation member, and a mounting member providing first and second pivotable mounting locations for said actuation lever, said actuation lever, when mounted in said first mounting location, serving to actuate a liquid dispensing movement of the operation member when pivoted in a first direction, and when mounted in said second mounting location, serving to actuate a liquid dispensing movement of the operation member when pivoted in a second direction opposite said first direction.

12. A liquid dispenser according to claim 11, wherein said mounting member comprises a pair of walls extending along opposite sides of said operation member and providing said first and second pivotable mounting locations forwardly and rearwardly of said operation member, respectively, whereby when said actuation lever is mounted in said first mounting location, said liquid dispensing movement is actuated by pushing said actuation lever rearwardly, and when said actuation lever is mounted in said second mounting location, said liquid dispensing action is actuated by pulling said actuation lever forwardly.

13. A liquid dispenser according to claim 12, wherein said first and second mounting locations are defined by forward and rearward pairs of pivot holes provided in said walls, for receiving a pivot pin of said actuation lever.

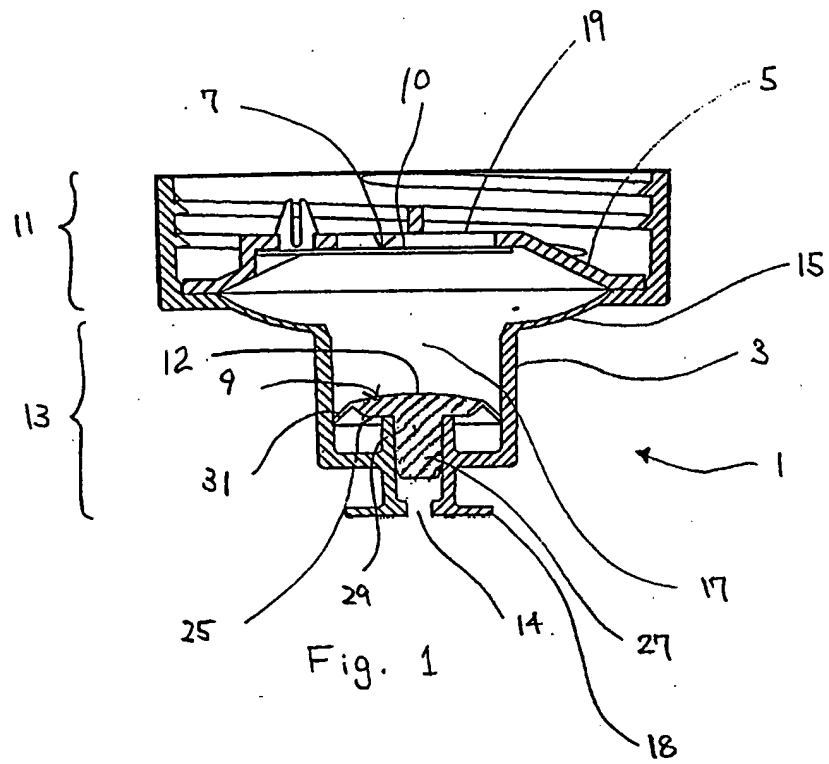

2/5

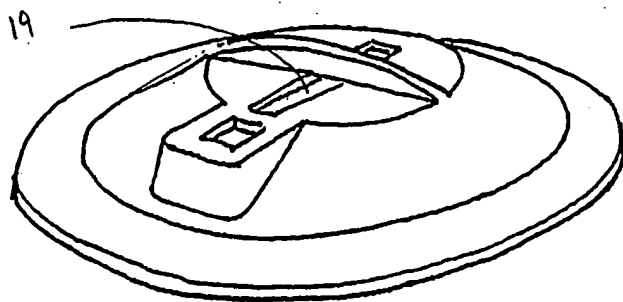


Fig. 2

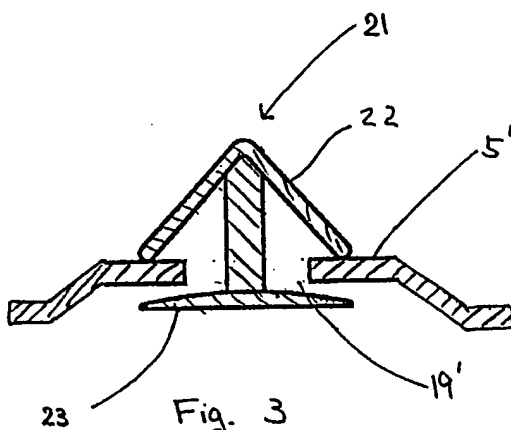


Fig. 3

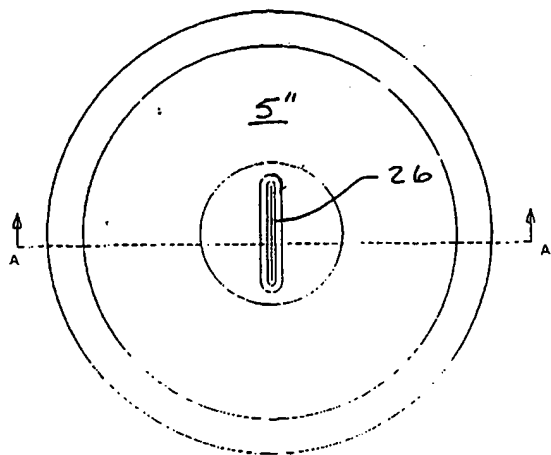


Fig. 4

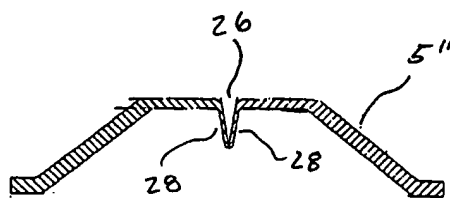


Fig. 5

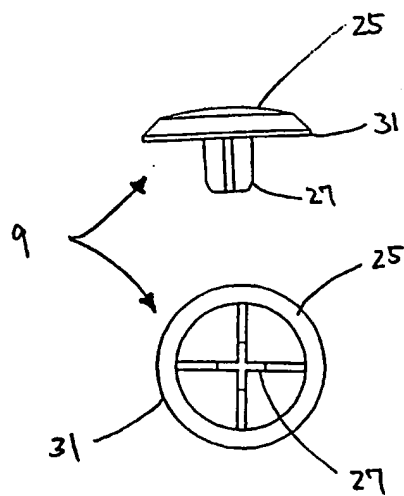


Fig. 6

Fig. 7



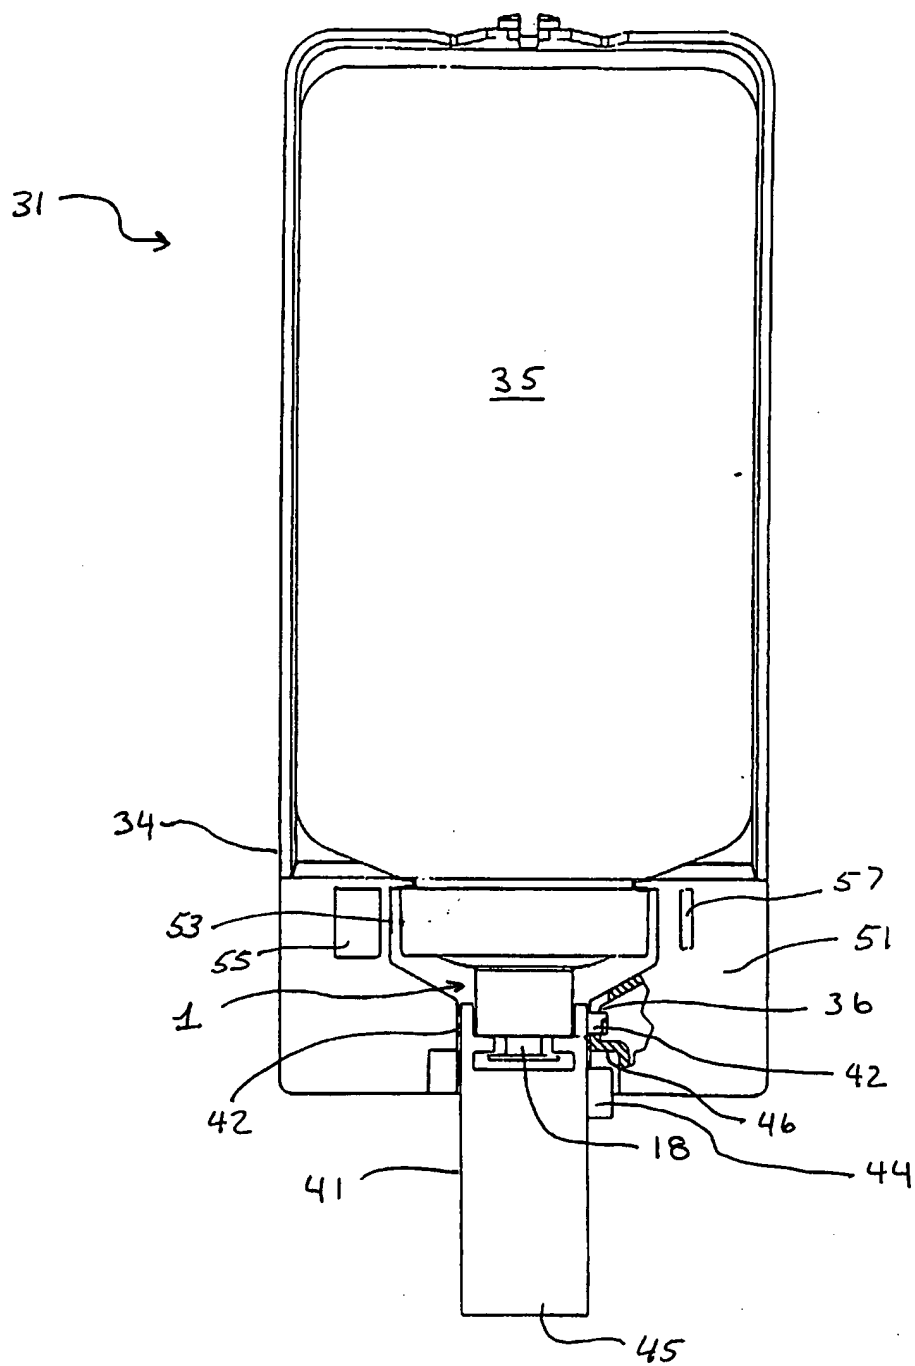


Fig. 8

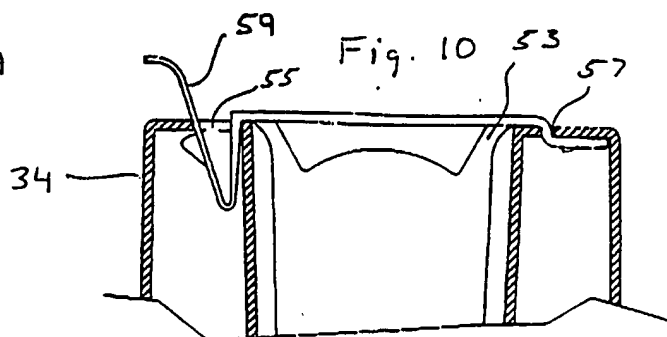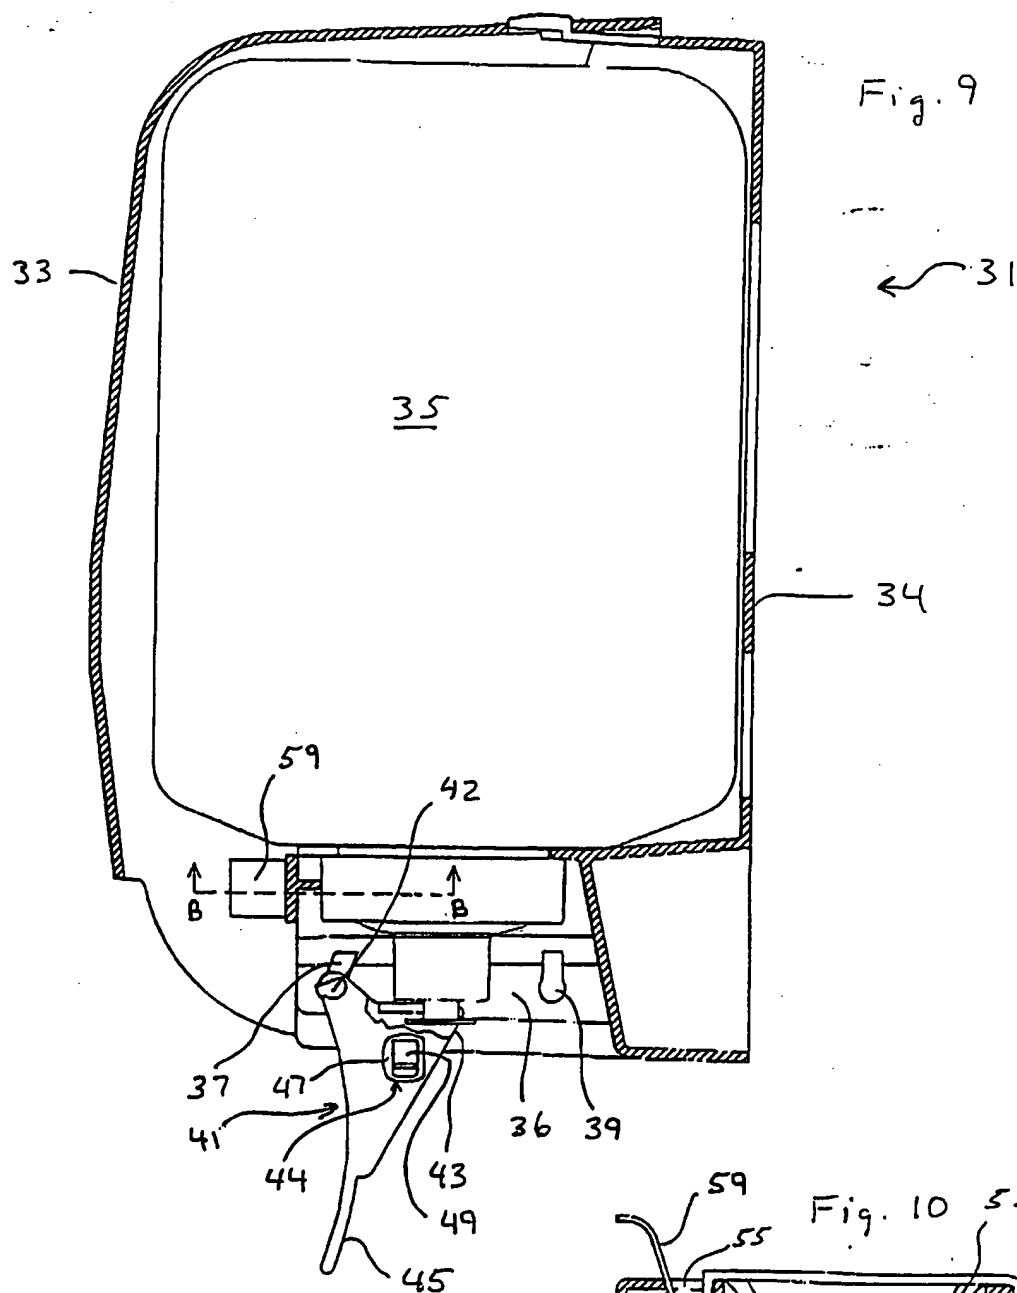

INTERNATIONAL SEARCH REPORT

Int. Jonal Application No
PCT/US 97/23763

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A47K5/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A47K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 242 253 A (ALPHA SYSTEMS) 21 October 1987	1,2,6
A	see column 2, line 13 - column 3, line 25; figures 1-9	3,5,8-10
Y	US 3 828 985 A (SCHINDLER) 13 August 1974 cited in the application	1,2,6
A	see column 1, line 63 - column 3, line 40; figures 1-5	3,5,9,11
A	US 4 978 036 A (BURD) 18 December 1990 cited in the application see column 2, line 59 - column 4, line 54; figures 1-11	1-3,5,6,9,11
A	DE 94 16 473 U (HERDIN) 15 December 1994	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

30 March 1998

Date of mailing of the international search report

16/04/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Clasing, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Patent Application No.

PCT/US 97/23763

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 242253 A	21-10-87	FR 2597551 A	23-10-87
		CA 1274810 A	02-10-90
		JP 8025569 B	13-03-96
		JP 62260669 A	12-11-87
		US 4776495 A	11-10-88
<hr/>			
US 3828985 A	13-08-74	AR 196998 A	08-03-74
		AT 324575 B	10-09-75
		AU 460394 B	24-04-75
		AU 4339772 A	20-12-73
		BE 782404 A	16-08-72
		CH 539807 A	14-09-73
		DE 2225461 A	25-01-73
		FR 2144652 A	16-02-73
		GB 1362453 A	07-08-74
		NL 7207893 A	09-01-73
		SE 380721 B	17-11-75
<hr/>			
US 4978036 A	18-12-90	NONE	
<hr/>			
DE 9416473 U	15-12-94	NONE	
<hr/>			